


Black Out™

3M BLACK OUT

ARCHITECTURAL WINDOW FILM

INTERIOR

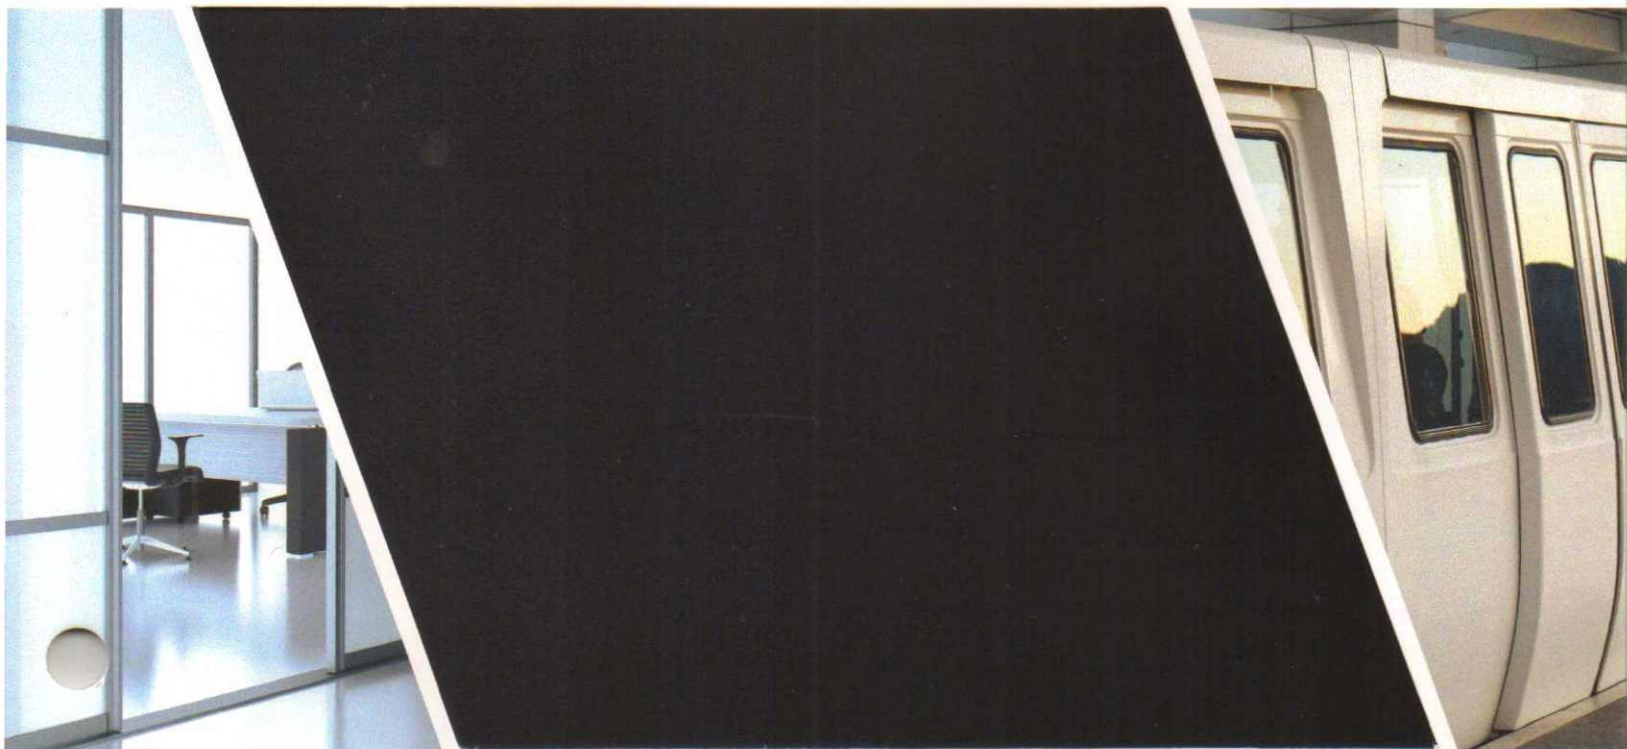

PRODUCT SPECIFICATIONS

Visible Light Transmittance	0%
Total Solar Transmittance	0%
Total Solar Reflectance	5%
Total Solar Absorbance	95%
Visible Light Reflectance	
Interior	6%
Exterior	6%
Winter U-Value	1.02
UV Rejected	100%
Glare Reduction	100%
Shading Coefficient	0.32
Solar Heat Gain Coefficient	0.28
Total Solar Energy Rejected	72%

All data values are representative and are provided for comparison purposes only.

BENEFITS

- Black appearance provides total privacy
- Blocks heat from the sun for a significantly more comfortable home or office building
- Blocks 100% of damaging UV rays
- Provides 100% glare reduction
- Backed by an exclusive manufacturer's warranty


SunTek
WINDOW FILMS

SPECIALTY

Black Out™

3M BLACK OUT ARCHITECTURAL WINDOW FILM

EXTERIOR

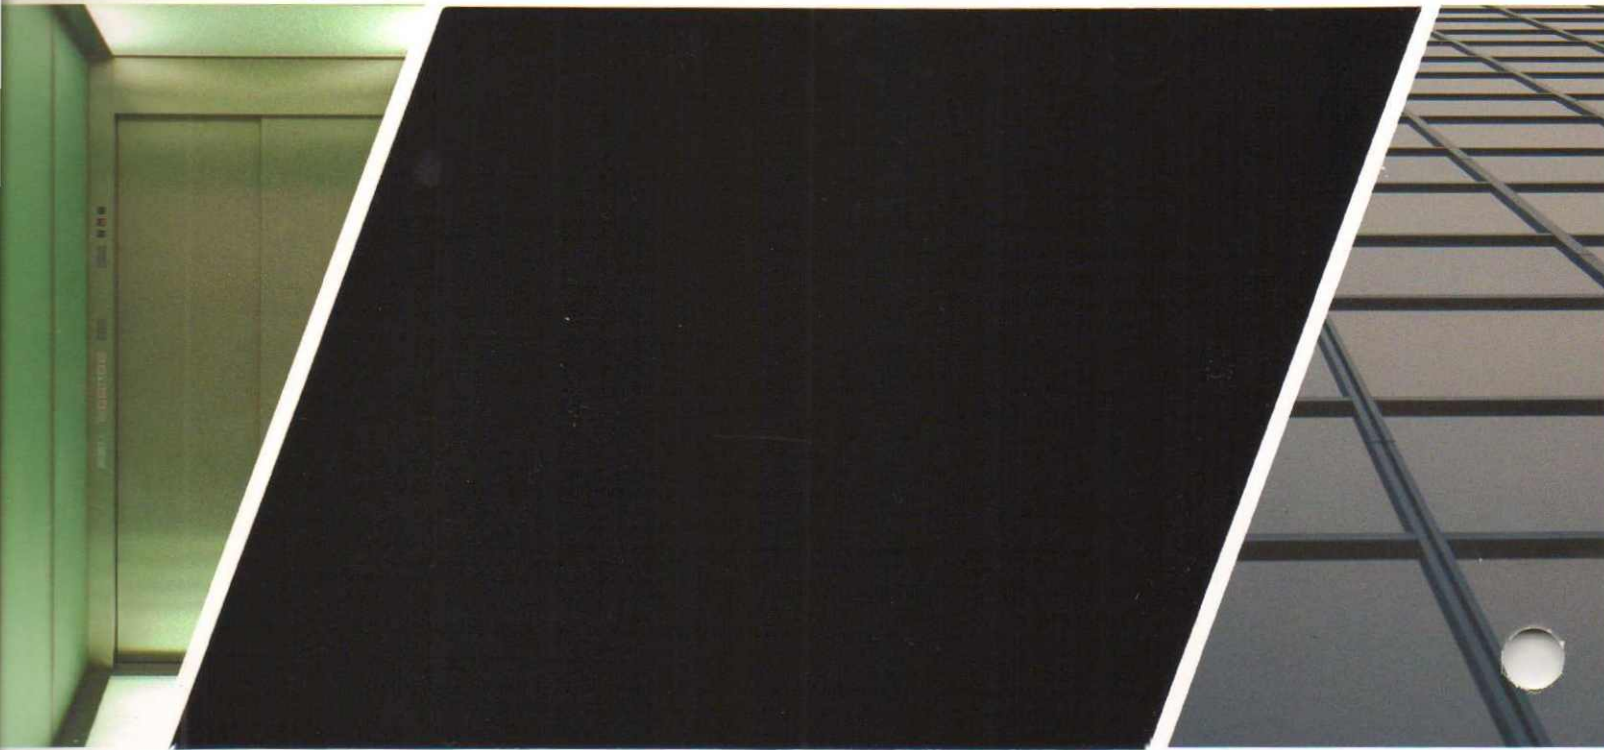

ENERGY EFFICIENT

SunTek® window films can significantly improve energy savings* by reducing heat gain and eliminating hot spots. In fact, professionally installed SunTek® window films can prevent up to 84% of the sun's energy from altering the internal environment of a home or office building.

ENVIRONMENTALLY FRIENDLY

All SunTek® products are environmentally friendly. As a company, SunTek® Window Films also supports environmental causes through volunteerism as well as employee and corporate donations. To learn more about our environmental efforts and for complete product information, visit our website at suntekfilms.com.

*The amount of savings will differ based on window film used and the size, construction, and geographic location of the home/building.

SunTek® Window Films
345 Beaver Creek Drive
Martinsville, VA 24112

276.632.4991
suntekfilms.com



AMERICAN SOCIETY OF
INTERIOR DESIGNERS

SunTek
WINDOW FILMS

PN0365 © 2014 Commonwealth Laminating & Coating, Inc. Printed in USA

SPECIALTY